

## Product Samples

### ATP1002: Nickel Metallizations Solderable

Applied Thin-Film Products (ATP) is pleased to provide ceramic thin-film samples for your evaluation.

TaN/Ni/TiW/Au is one of the solderable metallizations on Aluminum Oxide ( $Al_2O_3$ ) that ATP offers. Due to the layer of Ni, this metallization scheme allows for better soldering with integrated TaN resistors.

### Material Specifications

#### As-fired High Density 996 Aluminum Oxide Superstrate 996


Properties	Values
Chemical Composition	$Al_2O_3$
Purity	99.6%
Color	White
Nominal Density	3.88g/cm
Surface Finish (As-Fired)	$3.0\mu''$ (76.2nm)
Coefficient of Thermal Expansion (CTE)	$7.0 - 8.3 \times 10^{-6}$ (25-1000°C)
Camber	0.002'' (0.508 $\mu$ m)
Thickness	0.015'' (0.381mm)
Thickness Tolerance ( $\pm$ )	0.001'' (25.4 $\mu$ m)
Thermal Conductivity 100°C	26.9 Watts/m <sup>2</sup> K
Dielectric Constant 1 MHz	9.9 @ 1 MHz $\pm$ 0.1
Dielectric Constant 10 GHz	9.7 @ 10 GHz $\pm$ 0.1
Dissipation Factor (Loss Tangent)	0.0001 @ 1 MHz
Hardness (Rockwell)	87
Flexural Strength	90K (10 <sup>-3</sup> ) lbs/in <sup>2</sup> (620Mpa)
Compressive Strength	54M (10 <sup>-3</sup> ) lbs/in <sup>2</sup>
Grain Size	< 1.0 $\mu$ m

Material specifications provided by Coors Ceramic Company

ATP offers build-to-print service for a wide range of materials and metallization schemes. ATP fabricates circuits on substrates from As-Fired Alumina to Beryllium Oxide to Fused Silica, even Silicon. Metallizations range from the standard TaN/TiW/Au to films including Nickel, Palladium, or Titanium.

ATP1002: Material is 15 mil As-Fired  $Al_2O_3$   
 TaN Resistors = 50 Ohms per Square  
 TiW = 400-800 Ångströms  
 Ni = 1600-2400 Ångströms  
 Au = 120 $\mu''$  minimum  
 Has "Ni" indicator on circuit

### Sample Provided

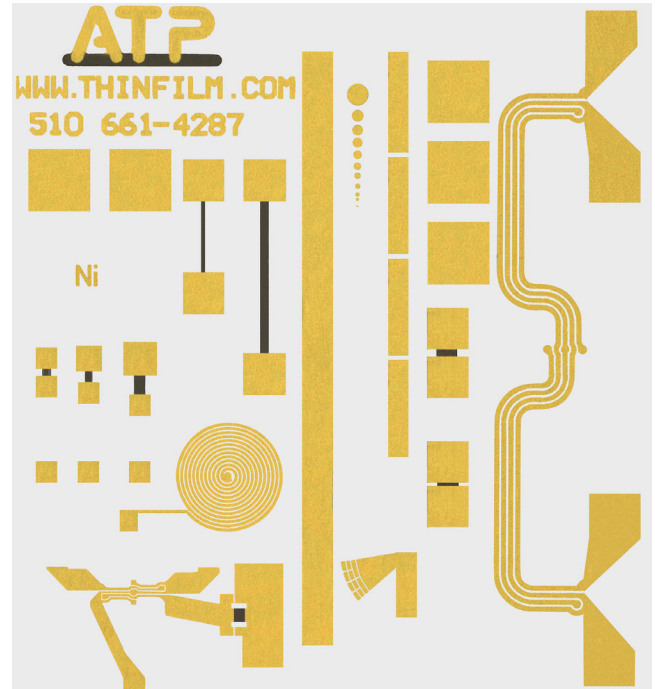

At ATP, we constantly evolve our processing and material capabilities to reflect our customer's changing needs. If you have a circuit requirement that is out of the "normal" thin-film type, please contact ATP at 1.510.661.4287 or visit our website at [www.thinfilm.com](http://www.thinfilm.com). ATP would enjoy discussing your application with you and working to develop a solution.